





# **Alendes** Quality Door Distribution

# PRODUCT RANGE GUIDE 2016

Page 5	The second secon		Page 7	Page 8	Page 9
Page 10	Page 11	Page 12	Page 13	Page	
E E E E E E E E E E E E E E E E E E E		Page 16	Page 17		Page 18
Page 19	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Page 21	Page 22	Page 24
Page 25	11 11 11 11 11 11 11 11 11 11 11 11 11	Page 27	E Fage		Page 29



Page 33

Page 34

Page 35



Page 36









Page 39



Page 40



Page 41



Page 42

----

Page 43











## Welcome

Expert knowledge, gained through trading in wooden panel products, timber components and doors for practically 50 years, is the foundation of our business. We maintain a strong ethical tradition, meaning that we will always attempt to do what is right and not what is expedient at the time. Our policy-applied for more than 20 years-is to deal with a carefully selected range of manufacturers with proper financial backgrounds and managements who are prepared to work to our quality standards. Personal relationships and trust ensure that the quality standards are maintained and that, if by chance any defect is found, the problem will be rectified without guibble and procedures examined to see if any improvement would eliminate or reduce the risk of a repeat. Our main storage site at Corsham, Wiltshire, is located conveniently close to the M4 motorway, enabling economic access to all areas of the country. We consider that a proper delivery service operates to customers' requirements and not to a fixed schedule of convenience principally to us. To achieve this service level we own a fleet of 7.5 tonne trucks and vans, but also make extensive use of selected carriers. With these facilities a delivery lead time rarely exceeds 48 hours and can frequently be managed in 24 hours if necessary.

# **Product Guarantee**

We offer a 10 year guarantee from the date of delivery on all timber doors. Some doors have been excluded from the guarantee; any exclusion is detailed on our literature and website. PM-Mendes (International) Limited undertakes to repair or replace, at the option of the Company, products which are shown to be defective in materials or manufacturing workmanship within the warranty period. This guarantee is intended for the original purchaser only and does not extend to subsequent purchasers during the length of this guarantee. No claim will be approved until a site inspection has been carried out by an experienced member of staff at the discretion of the Company. In the event of goods proving defective (manufacturer's defect only) which need replacement, our liability shall not exceed the price paid for the defective piece(s). This guarantee does not include associated charges such as labour for the removal, re-hanging or decoration of new or replacement piece(s) and/or any other works/service not originally supplied by PM-Mendes.

# **Environmental Pledge**

FSC® and PEFC Certified chain of custody timber door supplier.

PM-Mendes has successfully gained accreditation by the Forest Stewardship Council<sup>®</sup> (FSC<sup>®</sup>) and the Program for the Endorsement of Forest Certification (PEFC). This certification provides assurances that all the timber sourced for the manufacturing process of our forever growing range of FSC<sup>®</sup> and PEFC certified products, is from sustainable, legal and traceable sources.

Chain of Custody (CoC) certification is the process by which certified material can be traced from the forest to the consumer. It provides proof that the product being sold is linked to legally managed and certified products. This unbroken chain offers transparent proof that materials have been responsibly sourced. We currently hold FSC<sup>®</sup> and PEFC certified products in stock and as the demand for FSC<sup>®</sup> and PEFC certified products increase, so too will our stock holding. We are continuously working towards increasing and introducing new certified product ranges.

We have also taken the necessary steps to ensure we comply with the European Timber Regulation (EUTR) which means that all timber based products used in the manufacturing process of our products is legally sourced. In addition PM-Mendes has invested in facilities to segregate and re-cycle our waste and endeavour to purchase so called green options wherever possible. Our customers can be assured that any product purchased from us has made minimal contribution to the problem of global warming.



Some of the images appearing throughout this catalogue have been supplied courtesy of Bewley Homes PLC.



# **Size Conversion Chart**

Door sizes that appear in this catalogue - Metric to Imperial

#### **HEIGHT & WIDTH**

Metric (mm)	Imperial (inches)	Imperial (feet & inches)
1981 x 457	78" x 18"	6'6" x 1'6"
1981 x 533	78" x 21"	6'6" x 1'9"
1981 x 610	78" x 24"	6'6" x 2'0"
1981 x 686	78" x 27"	6'6" x 2'3"
1981 x 711	78" x 28"	6'6" x 2'4"
1981 x 762	78" x 30"	6'6" x 2'6"
1981 x 838	78" x 33"	6'6" x 2'9"
1981 x 864	78" x 34"	6'6" x 2'10"
1981 x 915	78" x 36"	6'6" x 3'0"
1981 x 1067	78" x 42"	6'6" x 3'6"
1981 x 1168	78" x 46"	6'6" x 3'10"
1981 x 1220	78" x 48"	6'6" x 4'0"
1981 x 1372	78" x 54"	6'6" x 4'6"
1981 x 1524	78" x 60"	6'6" x 5'0"
2032 x 813	80" x 32"	6'8" x 2'8"
2083 x 864	82" x 34"	6'10" x 2'10"
2134 x 915	84" x 36"	7'0" x 3'0"
2040 x 526	80¼" x 20 <sup>1</sup> ¼16"	6'8¼" x 1'81¼"
2040 x 626	80¼" x 24%"	6'8¼" x 2'0 <sup>5</sup> /8"
2040 x 726	80¼" x 28 <sup>5</sup> / <sub>8</sub> "	6'8¼" x 2'4 <sup>5</sup> / <sub>8</sub> "
2040 x 826	80¼" x 32½"	6'8¼" x 2'8½"
2040 x 926	80¼" x 36½"	6'8¼" x 3'0 <sup>7</sup> ⁄8"
2440 x 1220	96" x 48"	8'0" x 4'0"

# THICKNESS

Metric (mm)	Imperial (inches)
35mm	<b>1</b> ¾"
40mm	<b>1</b> <sup>37</sup> / <sub>64</sub> "
44mm	<b>1</b> <sup>47</sup> / <sub>64</sub> "
54mm	21/8"

#### IMPORTANT

SHOULD YOU NOT FIND THE SIZE OF THE DOOR YOU ARE LOOKING FOR IN THE ABOVE CHART, PLEASE CONTACT OUR SALES TEAM AS WE CAN ALSO OFFER 'MADE TO MEASURE' IN CERTAIN DOOR TYPES.

# **Our Products Explained**

We hold a range of stock that is known to be popular to the majority of consumers and, because service is paramount, our stock is considerable. If, however, we are not showing a door that you require, please do let us know as we can probably obtain it for you. Doors in this catalogue have been separated into Internal and External categories, and then grouped into popular ranges. Inevitably the names used will differ from those used by other suppliers, but we have tried wherever possible to use the most common name to describe a door by its' characteristics.



# Contents

INTERIOR DOORS	4
Internal Oak	5-20
Internal Walnut	6, 21 & 22
Internal Flush Veneer	21
Internal Oak Pairs	18 & 19
Internal Oak Linings, Architraves & Skirti	ng 23
Internal White	24-27
Internal Pine	28-29
Additional Door Servicing	30
Door Set & Screen options	31
Internal PREMDOR	49-59

EXTERIOR DOORS	32
External Oak	33-35
External Oak Pairs	36 & 37
External Oak Sidelights	38
External Oak Thermal Rated	39
External Hardwood	40-44
External Hardwood Pairs	45
External Oak Frames	46
External Hardwood Frames	47
External Redwood & External Door Blanks	48
External PREMDOR	60-61

# OTHER

Product Guarantee	2
Environmental Pledge	2
Windows	62-65
Ironmongery	66-69
Pocket Systems & Sliding Door Gear	70-71
Care & Installation	72
Treatment of Doors and Terms & Conditions	73





# Internal Doors

Our internal doors are manufactured to an extremely high standard, by factories that are considered to be market leaders in providing value for money without compromising product quality. The doors are manufactured using the 'preferred' engineered construction, which ensures maximum stability. The stiles are edged with a minimum of 10mm thick solid lipping and over veneered.

We now stock a range of FSC<sup>®</sup> and PEFC certified products. Products which are FSC<sup>®</sup> certified are detailed throughout the catalogue, look out for the FSC<sup>®</sup> logo on pages which have FSC<sup>®</sup> certified products.

Unless stated otherwise, internal doors are supplied unfinished.

# SEE WHAT'S NEW FOR 2016

Internal Oak Corsica (page 5) Internal Oak Iseo (page 7) New sizes available Internal Oak Mexicano 4 Light (page 15) Internal White Iseo (page 25) New sizes available Wider range of Premdor products (pages 49-61)



# Pre-finished Oak Capri & Corsica doors

OAK CAPRI

Standard 35mm

1981 x 457mm 1981 x 533mm

1981 x 610mm

1981 x 686mm

1981 x 762mm

1981 x 838mm

FD30 44mm

1981 x 610mm 1981 x 686mm

1981 x 762mm 1981 x 838mm

Attractive double feature

'V' groove detail

REC-CUIN

The mark of

responsible forestry

New in 2015/16, The Oak Corsica range which compliments our Capri range, will offer a modern feel to any home. Incorporating quality crown cut cross directional veneers and attractive feature 'V' grooves, this range is sure to prove popular.



#### OAK CAPRI (FSC)

- Attractive feature 'V' grooves
- FSC® Chain of Custody on the Capri & Capri 3 light only
- 35mm thick doors have a semi solid construction and 10mm solid oak lipping.
- 44mm thick doors have a solid particle board core and 18mm solid oak lipping.
- Quality open pore clear satin lacquer finish as standard.
- · Crown cut cross directional veneered faces.
- Glazing to the Capri 3 light standard and FD30 option is clear flat as is the Corsica 1 light.



OAK CAPRI 3 LIGHT GLAZED (FSC)

**Standard 35mm** 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

> **FD30 44mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm

1981 x 838m

**Standard 35mm** 1981 x 457mm 1981 x 533mm 1981 x 610mm 1981 x 686mm 1981 x 762mm

#### **FD30 44mm** 1981 x 610mm 1981 x 686mm 1981 x 762mm

1981 x 838mm

1981 x 838mm

**OAK CORSICA** 





**Standard 35mm** 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.

Internal



# Pre-finished Oak & Walnut Iseo crown cut veneer doors

With solid oak feature 'V' grooves, this style of door remains a popular choice. See also our Oak Deluxe Iseo range featured on page 7.

- 35mm thick doors have a semi solid construction and 10mm solid oak or walnut lipping on two long edges and 5mm on the top and bottom edges.
- 44mm thick doors have a solid particle board core and 20mm solid oak or walnut lipping on two long edges with 10mm on the top and bottom edges.
- Quality open pore clear satin lacquer finish as standard.
- Crown cut cross directional veneered faces.
- Glazing to the 35mm thick doors is clear toughened with a bevelled edge and clear flat fire rated is fitted to the 44mm thick FD30 4-light option.



Solid Oak/Walnut feature 'V' groove detail



Standard 35mm 1981 x 457mm 1981 x 711mm 1981 x 533mm 1981 x 762mm 1981 x 610mm 1981 x 838mm 1981 x 686mm 2032 x 813mm

FD30 44mm 1981 x 610mm 1981 x 762mm 1981 x 686mm 1981 x 838mm



**OAK ISEO CENTRAL 4 LIGHT GLAZED** 

Standard 35mm			
1981	x 610mm	1981 x 762mm	
1981	x 686mm	1981 x 838mm	
FD30 44mm			
1981	x 610mm	1981 x 762mm	
1981	x 686mm	1981 x 838mm	



WALNUT ISEO

Standard	35mm
1981 x 457mm	1981 x 686mm
1981 x 533mm	1981 x 762mm
1981 x 610mm	1981 x 838mm
ED00 4	A
FD30 4	4mm
1981 x 610mm	1981 x 762mm
1981 x 686mm	1981 x 838mm



WALNUT ISEO CENTRAL **4 LIGHT GLAZED** 

Standard 35mm		
1981 x 610mm 1981 x 762mm		
1981 x 686mm 1981 x 838mm		
FD30 44mm		

1981 x 762mm 1981 x 838mm

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.



# Pre-finished Deluxe Oak Iseo & Orta quarter cut veneer doors



# OAK ISEO Standard 35mm

1981 x 457mm 1981 x 533mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

**Metric 40mm** 2040 x 626mm 2040 x 726mm 2040 x 826mm

**FD30 44mm** 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm 1981 x 915mm

Metric FD30 44mm

2040 x 626mm 2040 x 726mm 2040 x 826mm 2040 x 926mm

#### OAK ISEO

- 35mm thick doors have a solid core construction and 10mm solid oak lipping on two long edges and 5mm on the top and bottom edges.
- 44mm thick doors have a solid core construction and 20mm solid oak lipping on two long edges with 10mm on the top and bottom edges.
- Closed pore satin lacquer finish.
- Quarter cut cross directional veneered faces.
- Glazing to the 35mm thick doors is clear toughened with a bevelled edge and glass of your choice can be fitted to the 44mm thick FD30 4-light option.
- Solid oak feature grooves (not painted).



#### OAK ISEO CENTRAL 4 LIGHT GLAZED

**Standard 35mm** 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

**Metric 40mm** 2040 x 726mm 2040 x 826mm

**FD30 44mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm



OAK ISEO OFFSET 4 LIGHT GLAZED

#### Standard 35mm

1981 x 686mm 1981 x 762mm 1981 x 838mm

**FD30 44mm** 1981 x 762mm 1981 x 838mm



OAK ORTA

**Standard 35mm** 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

**FD30 44mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.



DAK ORTA 1 LIGHT GLAZED

**Standard 35mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm

**FD30 44mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm



The mark of responsible forestry



# Pre-finished Oak Mirage doors

New in 2014 the Oak Mirage incorporates cross directional oak veneers with a vertical Ash inlay.

- Contrasting Ash inlay.
- FSC<sup>®</sup> Chain of Custody.
- 35mm thick doors have a semi solid construction and 10mm solid oak lipping.
- 44mm thick doors have a solid particle board core and 18mm solid oak lipping.
- Quality open pore clear satin lacquer finish as standard.
- Crown cut cross directional veneered faces.
- Glazing to both the 35mm thick and 44mm thick FD30 3-light option is clear flat.



Contrasting Ash inlay detail



OAK MIRAGE

#### OAK MIRAGE Standard 35mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm FD30 44mm 1981 x 619mm

1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm



OAK MIRAGE 3 LIGHT GLAZED

# OAK MIRAGE 3 LIGHT Standard 35mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm FD30 44mm 1981 x 686mm 1981 x 762mm 1981 x 838mm



The mark of responsible forestry

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.



# Pre-finished Oak Vision with Walnut Inlay doors

In combining a very high closed-pore finish with stylish walnut full height vertical inlays, these doors offer a 5 star alternative to the standard flush door.

- Contrasting walnut inlay.
- 35mm doors have a solid core construction and 10mm solid oak lipping.
- 44mm FD30 has a particle board core and 18mm solid oak lipping.
- Quality closed-pore clear satin lacquer finish.
- Crown cut vertical veneered faces.
- Glazing to both the 35mm thick and 44mm thick FD30 4-light option is clear flat.

Contrasting walnut inlay detail



# OAK VISION 4 LIGHT Standard 35mm 1981 × 610mm 1981 × 686mm 1981 × 762mm 1981 × 686mm 1981 × 762mm 1981 × 838mm



OAK VISION			
Standard 35mm			
1981 x 457mm			
1981 x 533mm			
1981 x 610mm			
1981 x 686mm			
1981 x 762mm			
1981 x 838mm			
FD30 44mm			
1981 x 610mm			
1981 x 686mm			
1981 x 762mm			
1981 x 838mm			

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.




# Oak Flat Panel Shaker style doors

For those desiring to introduce a sharp modern theme throughout their living quarters, look no further! Ideal for enhancing any such house or apartment, our contemporary range of doors will fit most requirements with three available patterns to choose from.

- Modern flat panel design.
- 35mm thick doors have a solid timber core construction and 10mm solid oak lipping.
- 44mm thick doors have a solid timber core construction and 18mm solid oak lipping.
- Supplied un-finished for on-site decoration.
- Quarter cut veneered faces.
- Glazing to the 35mm thick doors is clear toughened.
- The FD30 2 Light can be clear flat glazed or supplied un-glazed for on-site glazing. The beading will be raised in accordance with the associated fire certificate.

\* Special Order-Lead-time 3-5 weeks. Call 01225 811411 for the price and current availability.

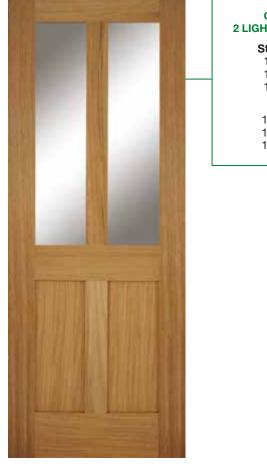

**OAK BRISTOL 2 PANEL 2 LIGHT GLAZED** 





**OAK BRISTOL 4 PANEL** 

#### Standard 35mm 1981 x 457mm 1981 x 533mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm FD30 44mm 1981 x 610mm 1981 x 686mm

1981 x 762mm 1981 x 838mm



**OAK BRISTOL 4 PANEL** 

Note - The FD30 glazed options on this page can be supplied with glass of your choice.



# Oak Flat Panel Shaker style doors Continued...



OAK MARLBOROUGH 1 PANEL 1 LIGHT GLAZED

**Standard 35mm** 1981 x 686mm 1981 x 762mm



**OAK MARLBOROUGH 2 PANEL** 

Standard 35mm			
1981 x 457mm	1981 x 686mm		
1981 x 533mm	1981 x 762mm		
1981 x 610mm	1981 x 838mm		

**FD30 44mm** 1981 x 686mm 1981 x 838mm 1981 x 762mm



OAK CONTEMPORARY 4 LIGHT GLAZED

**Standard 35mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm



**OAK CONTEMPORARY 4 PANEL** 

Standard 35mm			
1981 x 610mm	1981 x 762mm		
1981 x 686mm	1981 x 838mm		

**FD30 44mm** 1981 x 686mm 1981 x 838mm 1981 x 762mm



# Oak Flat Panel with Recessed Bead

- Laminated timber stiles and rails.
- Flat panels.
- Profiled beading.
- Clear flat glass in the Salisbury glazed.
- 1930 3 panel 1 light is unglazed to fit glass of your choice (can be supplied glazed if required).
- This range is supplied un-finished.



Flat panel with profiled beading



#### OAK SALISBURY 3 PANEL OAK

Standard 35mm				
1981 x 762mm				
1981 x 838mm				
2032 x 813mm				
FD30 44mm				
1981 x 838mm				
2032 x 813mm				





OAK 1930 3 PANEL 1 LIGHT (UNGLAZED)

**Standard 35mm** 1981 x 686mm 1981 x 762mm



#### OAK 1930 4 PANEL

Standard 35mm			
1981 x 610mm 1	981 x 762mm		
1981 x 686mm 1	981 x 838mm		
1981 x 711mm 2	032 x 813mm		
FD30 44mm			
FD30 44mm			
1981 x 686mm 1	981 x 838mm		

1981 x 762mm 2032 x 813mm

Standard 35mm

1981 x 610mm 1981 x 838mm

1981 x 686mm 2032 x 813mm

1981 x 762mm



Character doors, popular for both barn and cottage renovations or conversions. Supplied in an overall thickness of 40mm (18mm boarding and 22mm bracing) to give a solid, chunky feel.

- 40mm overall thickness.
- 18mm boarding.
- 22mm bracing.
- Solid laminated timber core with 2mm crown cut rustic oak veneer.
- 20mm solid oak lippings.
- Supplied unfinished.

Please note that the traditional design of these doors will often lead to movement within the product. The likelihood of movement will be reduced if:

- a) the door is fully treated against moisture ingress prior to installation.
- b) 3 hinges are fitted.
- c) the door is fitted in a fully established atmospheric condition.

As it is impossible to 'police' an installation after the event has taken place, the manufacturer is therefore unwilling to guarantee this product.



**LEDGED & BRACED** 



**OAK LEDGED & BRACED** 

Standard 40mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm



**BACK OF OAK** LEDGED & BRACED

**OAK FRAMED LEDGED & BRACED** 

Standard 40mm

1981 x 610mm

1981 x 686mm

1981 x 762mm

1981 x 838mm



Traditional doors with raised and fielded panels.

- Laminated timber stiles and rails.
- Raised and fielded panels.
- Glazed doors fitted with clear toughened bevelled glass.
- Doors in this range are supplied un-finished.





**FD30 44mm** 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

2032 x 813mm



OAK OXFORD GLAZED

**Standard 35mm** 1981 x 762mm 1981 x 838mm



**Standard 35mm** 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm





**Standard 35mm** 1981 x 838mm

Standard 40mm 1981 x 686mm



**OAK 6 PANEL** 

Standard 35mm 1981 x 610mm				
1981 x 686mm				
1981 x 762mm				
1981 x 838mm				
FD30 44mm				
1981 x 686mm				
1981 x 762mm				
1981 x 838mm				



# Oak Recessed doors Continued...

- · Mexicano door grooved to create plank effect.
- Cottage door fully boarded to top and bottom rails.
- The Cottage 6 Light and Mexicano 4 Light are both fitted with clear toughened bevelled glass.
- Pattern 10 has clear flat toughened glass.



#### **OAK MEXICANO** Standard 35mm 1981 x 457mm 1981 x 533mm 1981 x 610mm 1981 x 686mm 1981 x 711mm

1981 x 762mm 1981 x 838mm 2032 x 813mm Standard 40mm 2040 x 626mm

2040 x 726mm 2040 x 826mm

FD30 44mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm 1981 x 915mm



**OAK MEXICANO 4 LIGHT** 

Standard 35mm 1981 x 686mm 1981 x 762mm 1981 x 838mm



Standard 35mm 1981 x 457mm 1981 x 533mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

FD30 44mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm



Standard 35mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

FD30 44mm 1981 x 762mm 1981 x 838mm



x Or


Standard 35mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm

**OAK MEXICANO** 

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.



- Laminated timber stiles and rails.
- Solid oak raised bead around panels and glass.
- Glass in 35mm doors is clear toughened bevelled.
- Glass in 44mm FD30 is clear flat.
- Supplied unfinished.

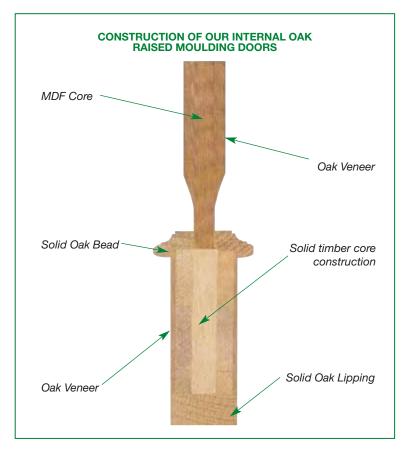

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.



OAK IRIS 2 PANEL

**Standard 35mm** 1981 x 610mm 1981 x 762mm 1981 x 686mm 1981 x 838mm

**FD30 44mm** 1981 x 686mm 1981 x 838mm 1981 x 762mm



**OAK IRIS 6 LIGHT GLAZED** 

**Standard 35mm** 1981 x 610mm 1981 x 762mm 1981 x 686mm 1981 x 838mm

**FD30 44mm** 1981 x 686mm 1981 x 838mm 1981 x 762mm



OAK 8 LIGHT GLAZED

 Standard 35mm

 1981 x 610mm
 1981 x 762mm

 1981 x 686mm
 1981 x 838mm



# Oak Raised Moulding doors Continued...



#### **OAK 4 PANEL**

OAK 4 PANEL Standard 35mm 1981 x 457mm (2 Panel)

1981 x 533mm (2 Panel) 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 838mm 2032 x 813mm

> **FD30 44mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm 2032 x 813mm



Solid oak raised bead profile

**Standard 35mm** 1981 x 686mm 1981 x 838mm 1981 x 762mm

OAK OXFORD GLAZED

**FD30 44mm** 1981 x 686mm\* 1981 x 838mm 1981 x 762mm



#### OAK LOUIS

**Standard 35mm** 1981 x 610mm 1981 x 762mm 1981 x 686mm 1981 x 838mm

**FD30 44mm** 1981 x 686mm 1981 x 838mm 1981 x 762mm



#### OAK RIVIERA GLAZED

**Standard 35mm** 1981 x 610mm 1981 x 762mm 1981 x 686mm 1981 x 838mm

\* Special Order— Lead-time 3-5 weeks. **Call 01225 811411** for the price and current availability.

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.



# Pre-finished Oak Pairs & matching single door options

The pairs and single doors featured on this page are 40mm thick to give an extremely solid feel and extra stability. The doors are engineered with Oak lippings and face veneers. All doors are supplied pre-finished as standard and the pairs have a 12mm rebate—RHPO—i.e. the right leaf pushes open when facing the doors: glass fitted throughout the range is clear toughened bevelled.

OAK HEATH Standard 40mm 1981 x 610mm 1981 x 686mm 1981 x 762mm 1981 x 686mm 1981 x 686mm 1981 x 762mm 1981 x 838mm



OAK HEATH



#### OAK HAMPSTEAD GLAZED

**Standard 40mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm



#### OAK HAMPSTEAD GLAZED PAIR

**Standard 40mm** 1981 x 915mm 1981 x 1067mm 1981 x 1168mm 1981 x 1220mm 1981 x 1372mm 1981 x 1524mm



# Pre-finished Oak Pairs & matching single door options Continued...



#### OAK CHISWICK GLAZED

**Standard 40mm** 1981 x 686mm 1981 x 762mm 1981 x 838mm



OAK CHISWICK GLAZED PAIR



OAK ORIENT GLAZED PAIR

**Standard 40mm** 1981 x 1067mm 1981 x 1168mm 1981 x 1220mm 1981 x 1372mm 1981 x 1524mm



With the attractive flat faced raised mouldings and deep profiled panels, this range of doors provides a wow factor.

- 40mm thick doors have a solid timber core and a minimum of 10mm solid oak lipping.
- 44mm thick doors have a solid timber core and an 18mm solid oak lipping.
- Quality closed-pore clear satin lacquer finish as standard.
- Glazing to the 40mm thick doors is clear toughened with a bevelled edge and clear flat fire rated is fitted to the 44mm thick FD30 3 Light and 2 light option if required.
- Flat faced raised moulding and deep profiled panels.
- Special oversized doors available on a lead-time of at least 12 weeks. Call the sales team for more information.



Flat faced raised bead & deep panel profile

Note - The FD30 glazed options on this page can be supplied un-glazed or with glass of your choice.



**OAK MADRID 3 PANEL** 

**Standard 40mm** 1981 x 610mm 1981 x 762mm 1981 x 686mm 1981 x 838mm

**FD30 44mm** 1981 x 686mm 1981 x 838mm 1981 x 762mm



#### **OAK MADRID 3 LIGHT**

**Standard 40mm** 1981 x 762mm 1981 x 838mm

**FD30 44mm** 1981 x 762mm 1981 x 838mm



OAK MADRID 2 LIGHT

**FD30 44mm** 1981 x 762mm 1981 x 838mm

Special order only 16 week lead-time





The 'Verde' range of doors offer the vertical grained 'flush' in ash or oak veneer or the cross veneered 'Aspect' in either oak or walnut veneer. The doors are all 44mm thick as standard; the oak flush veneer is also available in a 35mm thick solid core option. The core of the oak and ash flush is high density particle board and the Aspect doors boast the preferred solid timber core. Both the flush and Aspect doors have lippings on all 4 edges to match the face veneer. The finish on all doors within this range is a clear satin lacquer.





# Walnut Nova

- Nova range has solid laminated timber core with crown cut walnut cross directional veneers.
- Polished aluminium look inlays.
- Nova 1 light can be supplied unglazed or with glass of your choice.



**FD30 44mm** 1981 x 686mm 1981 x 838mm 1981 x 762mm



Polished aluminium look inlay



WALNUT NOVA

**FD30 44mm** 1981 x 610mm 1981 x 762mm 1981 x 686mm 1981 x 838mm



# Internal Oak Door Linings, Architraves & Skirting

These mouldings are constructed with a solid laminated timber core over-veneered with oak. The sets are available in two profiles 'UK' and 'Modern' and are supplied in boxed packs as indicated below.





# **Deluxe White Primed - Grooved doors**


The deluxe white primed Capri doors were new to our range for 2014. Doors are of semi-solid construction and supplied with a factory applied 2 coat PU white prime finish. Please note that whilst the level of finish is extremely high, we recommend that a further top coat be applied to ensure all cut-outs and trimmed areas are fully sealed when hung.

- Double feature 'V' grooves.
- FSC<sup>®</sup> Chain of Custody.
- 35mm thick doors have a semisolid construction.
- 44mm thick doors have a solid particle board core.
- 2 coat white prime finish (topcoat to be applied).
- Glass in the 3 light is clear flat toughened.



Attractive double feature 'V' groove detail

WHITE CAPRI






The mark of responsible forestry



# Deluxe White Primed - Grooved doors Continued...

The glass in the Iseo 4 Light 35mm door is clear bevelled and the 44mm fire doors can be supplied un-glazed or with clear flat glass. The Orta 1 Light has clear glass with an etched border.

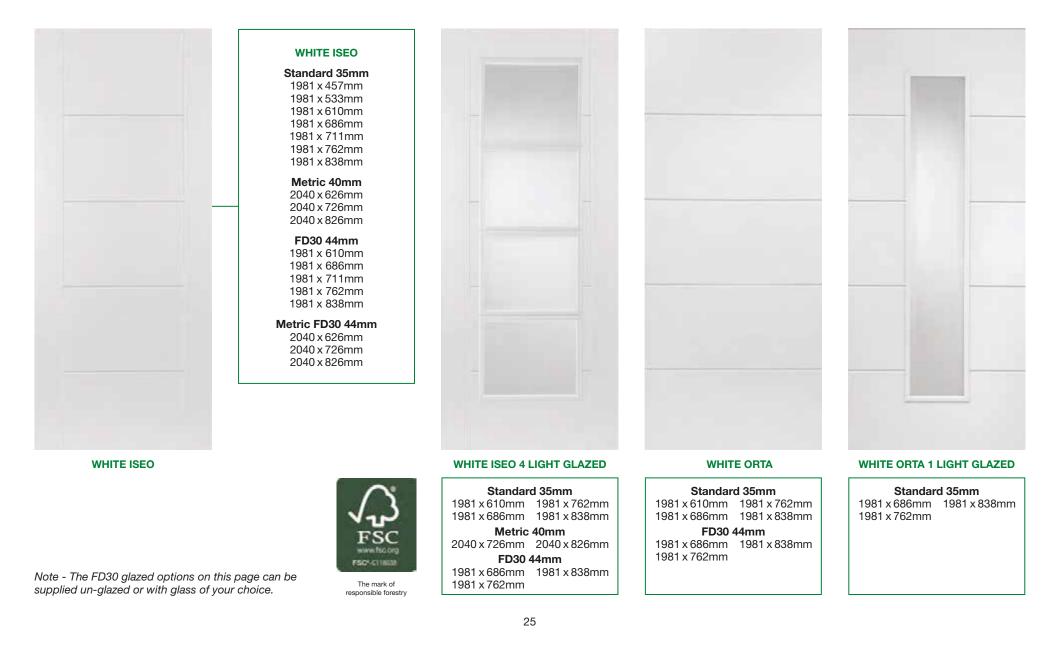



# Deluxe White Primed - Panelled Shaker Style doors


The deluxe white primed panelled doors on pages 26 and 27 are of solid engineered construction and supplied with a two coat PU white prime finish. Whilst the level of finish is extremely high, we recommend that a further top coat be applied to ensure all cut outs and trimmed areas are fully sealed when hung.

- Flat shaker style panels.
- 35mm thick doors have a solid engineered construction.
- 44mm thick doors have a solid engineered construction.
- 2 Coat PU white prime finish (topcoat to be applied).
- Glass in the 2 Panel 2 Light and 1 light is clear flat toughened.





# Deluxe White Primed - Panelled Shaker Style doors Continued...

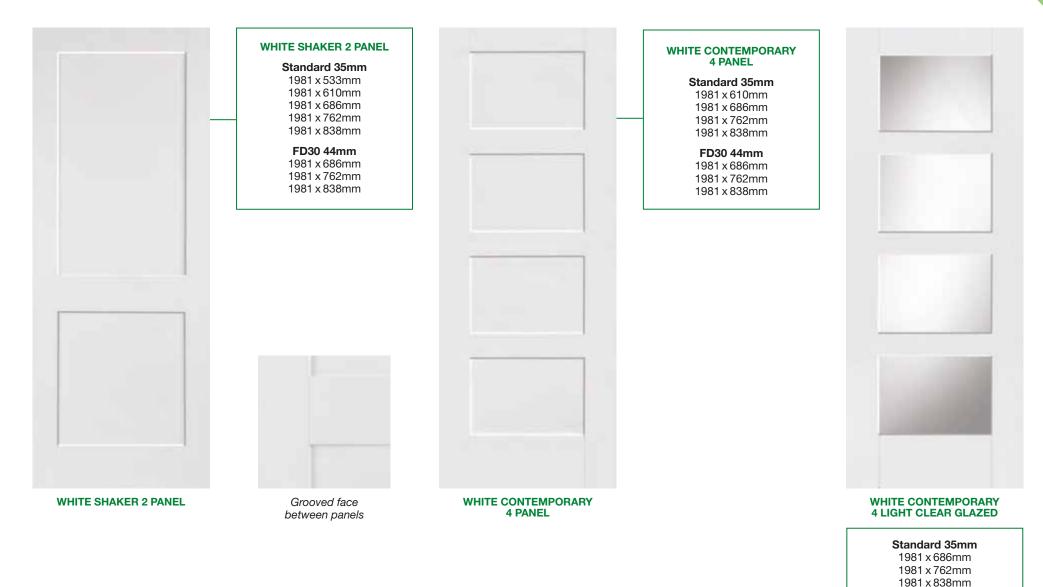

• Glass in Contemporary 4 Light is clear flat toughened.



Our internal pine doors are of engineered construction incorporating a mix of particle board and MDF component parts, a combination which offers both stability in the product and a weighty, solid feel to the door. The doors are lipped and faced with a clear Radiata pine, which is a species of timber native to New Zealand and renowned for its attractive colour and grain features. The doors are supplied unfinished. Please ensure that you use a solvent based product to seal/finish our pine doors. All glazed doors within this range are fitted with clear toughened bevelled glass as standard.



PINE OXFORD GLAZED

 Standard 35mm

 1981 x 686mm
 1981 x 838mm

 1981 x 762mm
 2032 x 813mm



**PINE 10 LIGHT GLAZED** 

 Standard 35mm

 1981 x 610mm
 1981 x 838mm

 1981 x 686mm
 2032 x 813mm

 1981 x 762mm
 1981 x 762mm



PINE WARWICK GLAZED

 Standard 35mm

 1981 x 686mm
 1981 x 838mm

 1981 x 762mm
 2032 x 813mm



# **Internal Pine Range - Flat Panels**

A range of flat panelled pine doors to suit dwellings both old and new! The Islington and Barnsbury patterns have a 'feature' bead planted on and around the edge of panels; the glazed models have clear toughened bevelled glass. The aptly named '1930' doors need no further description.



bead profile

PINE 1930 6 PANEL

Flat panel with bead profile



Save time and cost on-site by adding one of our additional door options to your order. We can offer a range of options to suit your needs, please see options below and call the sales team on **01225 811411** for current price and availability.




#### INTERNAL DOOR FINISHING


- Save time and site cost with pre-finished doors.
- Lacquering, priming and paint options available—call the sales team for further information.
- Professional high quality spray finish applied.
- Cut outs or trimmed areas will need to be painted after installation to ensure the product is fully sealed.



#### APERTURE CUTTING AND GLAZING

- An affordable way to machine and glaze apertures of your choice.
- Standard aperture option diagrams can be found on page 56.
- Bespoke aperture cutting and glazing available on most products.
- Clear, obscure, wired and fire rated glass options available.

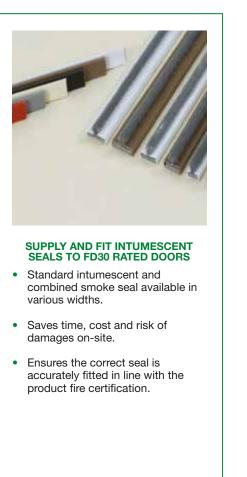



- FD30 rebating includes the correct intumescent strips to rebated meeting stiles.
- Right or left hand push or pull available—please specify when ordering.
- Remember—adding a 12mm rebate to your pair will reduce the overall width by 12mm.




# Internal Door-Sets & Screen Options

Door-sets are becoming increasingly popular for developers with the advantage being financial savings as well as time saving on-site. Below is just a small selection of the types of door-sets available—for further information, price and availability, please contact the sales team on **01225 811411**.

PREMDOR

# SpeedSet Plus & Sound Secure Door-Sets



#### SPEEDSET PLUS INTERNAL DOORSET SYSTEM

- Adjustable door set overcoming the problem of variation within a given wall thickness.
- SpeedSet Plus is a cost effective way of fitting a door and frame.
- Rapid installation: door-sets can be installed in less than 20 minutes.
- Door supplied pre-hung with CE marked latch and hinges as standard.
- Available with Premdor's standard core, semi solid, safe 'n' sound and FD30 fire doors.
- Damage risk is reduced as SpeedSet Plus is fitted later in the building programme.



# SOUND SECURE ENTRANCE DOORSET

- Specifically developed to meet the complex performance demands of apartment entrance locations.
- Sound Secure FD30 and FD60 door sets meet the requirements of all current legislation and more.
- Secured By Design as standard.
- FD30 version is supplied with a paint grade softwood frame or fully finished white Winkhause Ecoframe.
- FD60 version available on veneer styles only. Supplied in a paint grade hardwood frame.
- Several Premdor door options available for this competitively priced door set.

# Alternative Door-Sets & Screen Options



#### PRE-HUNG AND FULLY CERTIFIED DOOR SETS

- Pre-hung door sets are available in choice of veneers, laminates and fire ratings with matching architrave.
- Doors can be supplied with a wide range of standard or bespoke glazed or unglazed vision panels.
- Available with sound reducing door core specification up to 42 DB (non-fire).
- Secured By Design approved options available.
- Many widths and heights available including non standard.
- Various lock options available.
- Attractive apartment entrance door sets can also be compliant with mobility regulations.



# **GLAZED TIMBER SCREENS**

- This range of screens can be offered from our standard design or bespoke to your requirements.
- Produced to either match or contrast your doors or door sets depending on your design intent.
- Sidelights, fanlights or borrowed lights are all available in conjunction with standard door set lead-times.
- Screens can be supplied in varying timbers although glazing certification will prevail should fire ratings be requested.
- Available finishes include paint grade, veneered or moulded skin.





# External Doors


Our white oak doors are produced to an extremely high specification from component parts carefully chosen to accommodate the challenges laid down by the UK climate. The laminated timber stiles and rails offer stability against bowing and twisting and the stiles are edged with solid 18mm thick oak lippings. Raised mouldings and beads are also of solid white oak.

It is recommended that any external door, but particularly oak, must be protected from exposure to direct sun and rain. This is usually achieved by a porch, recess or overhang of a minimum of 1.5 metres. If this precaution is not observed, the performance and appearance of the door will not be satisfactory.

As with all timber products manufactured for external use, performance is reliant on both initial and ongoing maintenance. If a small area of the product is left untreated or if the exterior seal becomes cracked, moisture will penetrate (or escape in summer months!) causing the door to expand or contract at an abnormal rate. This is the most common reason for a door to fail.




For a truly modern look, this range boasts a bead which is flush to the face. For improved energy efficiency, all the doors come with double-glazed vision panels as standard. Matching sidelights are also available—see page 38 (Contemporary design). Supplied untreated for on-site finishing.

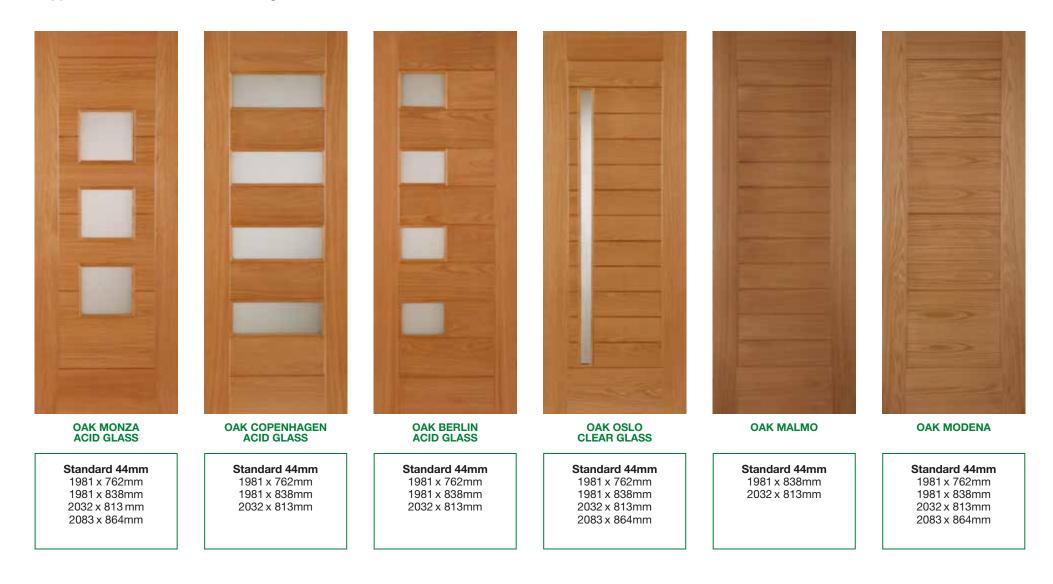



Doors on this page are fitted with a triple glazed sealed unit. Matching sidelight options are also available—see page 39. Supplied untreated for on-site finishing.

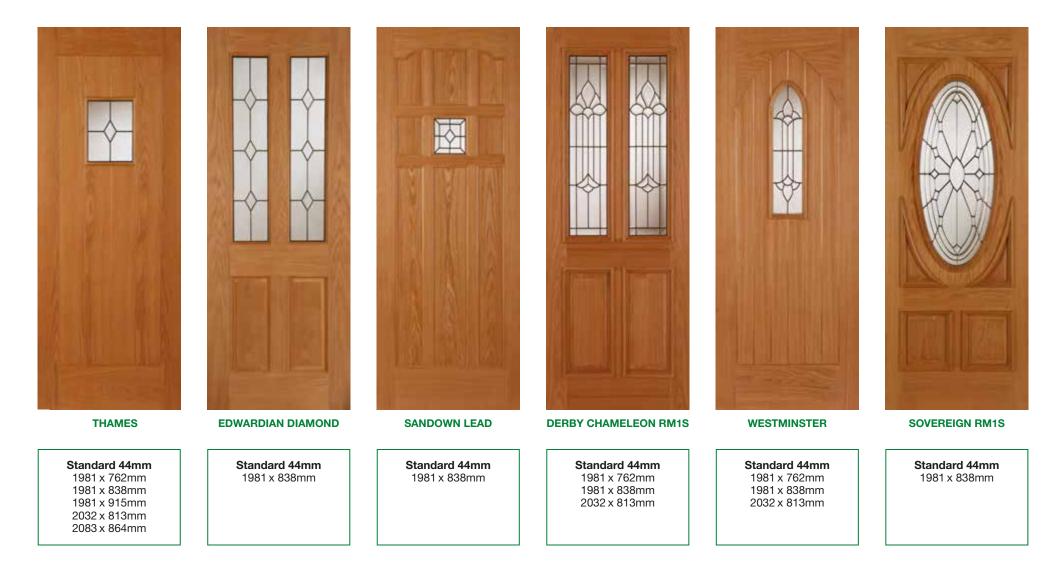



### External Oak Range - Traditional Continued...

The Stable, Wellington and Pattern 10 doors are supplied unglazed with loose bead to one side; the bead recess allows the fitting of a double glazed unit up to 14mm thick. Supplied untreated for on-site finishing.





### External Oak Range - Grand Entrance


Majestic doors are supplied as a single leaf, but can be rebated and used as pairs. The Empress doors are supplied right and left handed with a 12mm rebate to form a pair RHPO (RHPO—right hand leaf pushes open when facing the doors).

Both designs have raised mouldings on 1 side. Matching sidelights are also available—see page 39. Supplied untreated for on-site finishing.



MAJESTIC RM1S PAIR (ALSO SOLD INDIVIDUALLY)

**Standard 44mm** 1981 x 762mm 1981 x 838mm

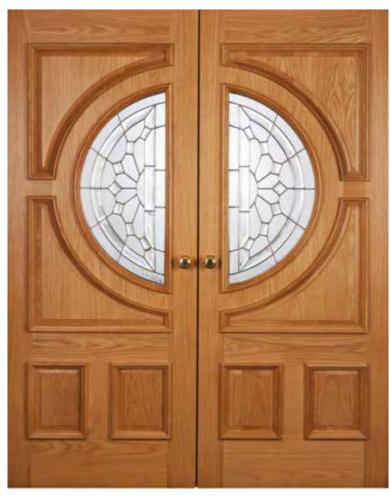

PHDA

EMPRESS RM1S PAIR (REBATED 12MM TO FORM PAIR)

#### Standard 44mm

1981 x 762mm (inc rebates) each leaf. O/A 1512mm per pair 1981 x 838mm (inc rebates) each leaf. O/A 1664mm per pair



### External Oak Double Glazed Pair



**PATTERN 20 REBATED PAIR** 

Fitted with clear double glazed units. Rebated RHPO (Right hand leaf pushes open when facing the doors). Supplied untreated for on-site finishing.

#### NOTE

INITIAL AND ON-GOING DECORATION/MAINTENANCE IS IMPERATIVE FOR THIS DOOR TYPE WHICH IS LIKELY TO BE HUNG IN AN EXPOSED LOCATION WITHOUT THE PROTECTION OF A PORCH OR OVERHANG.

### **External Door & Sidelight Options**

The doors and sidelights illustrated on this page are just a few examples of the different combinations which are available. The doors have been fitted into our external oak frame kits which can be found on page 47.

Our range of sidelights on the next page can be used in conjunction with any of our standard height external oak or hardwood doors to create a look which suits you.

For illustration purposes, these doors and side-lights are pre-finished. All of our external oak and hardwood doors are supplied un-finished for on-site decoration.



MAJESTIC + MAJESTIC SIDELIGHT



**DERBY CHAMELEON + DERBY SIDELIGHT** 



SOVEREIGN + SOVEREIGN SIDELIGHT

PATTERN 20 PAIR

(REBATED 12MM)

Standard 44mm

1981 x 1220mm

1981 x 1372mm

1981 x 1524mm 1981 x 1676mm



Some designs are specific to individual doors but the Universal and Contemporary sidelights which can be supplied with two choices of glass will offer an attractive solution in most other cases. Supplied untreated for on-site finishing.











**Standard 44mm** 1981 x 457mm CONTEMPORARY CLEAR GLASS

Standard 44mm 1981 x 457mm

RM1S = Raised Moulding 1 side



### External Oak Doors with Thermal Rating

To help achieve the thermal 'U' rating value for new build, these doors are constructed with an insulation membrane within the core and fitted with argon gas insulated 'K' glass units.





This quality range of attractive doors is designed to offer both solid (no glass) and glazed options to cover most tastes and requirements. The doors are of engineered construction and manufactured from component parts, which improves the performance of the finished article. With solid hardwood lippings and thick hardwood veneers, they have the look and feel of a solid timber door, with the added advantage of being a stronger and more stable product.

It is recommended that any external hardwood door must be protected from exposure to direct sun and rain. This is usually achieved by a porch, recess or overhang of a minimum of 1.5 metres. If this precaution is not observed, the performance and appearance of the door will not be satisfactory.

The glazed doors are fitted with hand made, triple glazed glass units which are secured in the doors with a mastic seal and a solid hardwood beading.

External hardwood doors are supplied untreated for on-site finishing.





### External Hardwood Range - Triple Glazed Continued...



#### **CLEVELAND ZINC RM1S**

**Standard 44mm** 1981 x 838mm 2032 x 813mm



#### ESTATE CROWN LEAD RM1S

**Standard 44mm** 1981 x 838mm 2032 x 813mm



#### EALING ROSE

Standard 44mm			
1981 x 762mm	2083 x 864mm		
1981 x 838mm 2032 x 813mm	2135 x 915mm		



ternal

#### EDINBURGH RM1S

**Standard 44mm** 1981 x 838mm 2032 x 813mm



### External Hardwood Solid & Un-Glazed Range



#### **COLONIAL 4 PANEL**

**Standard 44mm** 1981 x 762mm 1981 x 838mm 2032 x 813mm 2135 x 915mm



Standard 44mm			
1981 x 686mm	1981 x 915mm		
1981 x 762mm	2032 x 813mm		
1981 x 838mm			



#### **COLONIAL 6 PANEL**

Standard 44mm			
1981 x 762mm	2032 x 813mm		
1981 x 838mm	2083 x 864mm		
1981 x 915mm	2135 x 915mm		



121

#### HILLINGDON UN-GLAZED

Standard 44mm
1981 x 762mm
1981 x 838mm
2032 x 813mm



### External Hardwood Un-Glazed Range Continued...



Standard 44mm

1981 x 686mm 2032 x 813mm

1981 x 762mm 2083 x 864mm

1981 x 838mm 2135 x 915mm

1981 x 915mm



Standard 44mm

1981 x 762mm

1981 x 838mm

1981 x 915mm

2032 x 813mm



PATTERN 664

Standard 44mm
1981 x 762mm
1981 x 838mm
2032 x 813mm



1981 x 762mm

1981 x 838mm

2032 x 813mm



ing/

#### FALMOUTH

Standard 44mm Standard 44mm 1981 x 686mm 1981 x 915mm 1981 x 762mm 2032 x 813mm 1981 x 838mm

Note - un-glazed hardwood doors are suitable for a double glazed unit up to 14mm thick.



### External Hardwood Un-Glazed Range Continued...



RM1S = raised moulding 1 side

de Note—un-glazed hardwood doors are suitable for a double glazed unit up to 14mm thick and Stable doors are designed for the top to open inwards.




This range of external hardwood 'French' pairs are supplied un-glazed for on-site glazing with the glass of your choice. The doors are supplied rebated RHPO (right hand leaf pushes open first when facing the doors) and suitable for a double glazed unit up to 14mm thick.





Manufactured using solid white oak, these laminated door frame kits combine the visual features of oak with the added strength and stability an engineered product is able to offer. Each box kit contains: two jambs, one head, one cill and a drip bar. Lengths supplied in a single frame set can be cut to suit all single leaf oak doors to a maximum size of 2150 x 950mm. The frames are reversible to suit both inward and outward opening doors and draught strips are included. The frames are supplied unfinished and must be fully treated with a quality external wood finishing product to guarantee performance. A separate mullion is available if fitting doors and sidelights (one required per sidelight).

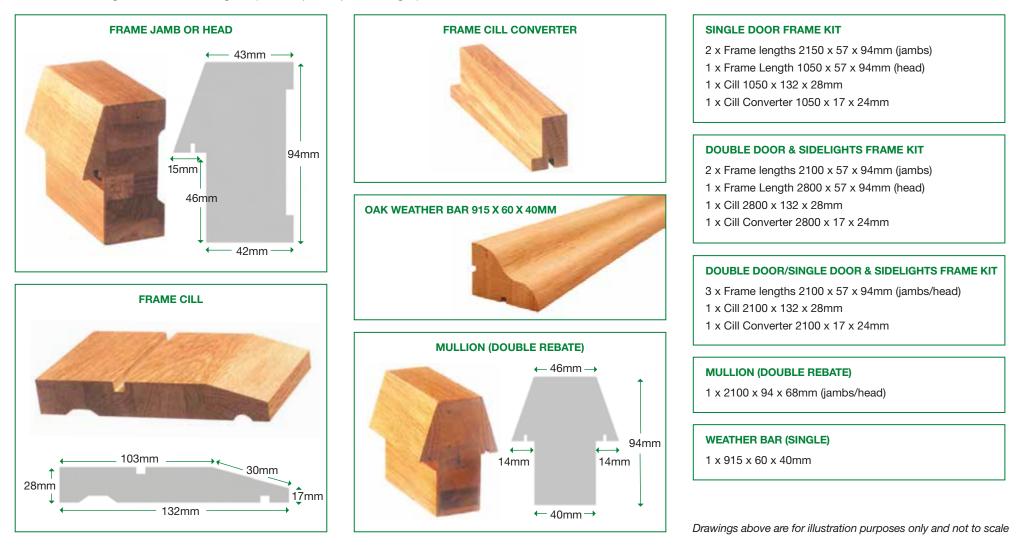



Our external hardwood frames are of solid laminated timber construction which is designed to give extra stability. The frame sets are supplied un-assembled and un-finished with a reversible cill for both inward and outward opening. Frames are grooved to accept a weather strip and a plastic water bar is included in the kit to fit the groove on the cill.



47



### External Redwood & External Door Blanks

Basic in design and traditional in appearance—but always the first choice for outbuildings or where a more traditional door design is preferred. These competitively priced doors, which are rustic in appearance, make these doors ideal for paint finishing. L&B doors are supplied with loose pinned braces for on-site handing. They are not recommended for internal use or for use as a domestic entrance door. The FL&B doors are also supplied loose pinned for on-site handing.

- FL&B 44mm thick with 14mm boards
- Un-finished for prompt on-site painting

FL&B & L&B are loose pinned for

on-site handing

L&B use 21mm board with 21mm braces



**LEDGED & BRACED** Standard 42mm 1981 x 610mm 1981 x 686mm

> 1981 x 762mm 1981 x 838mm 2032 x 813mm

& BRACED

1981 x 610mm

1981 x 686mm 1981 x 762mm 1981 x 838mm 2032 x 813mm



FRAMED LEDGED & BRACED (FL&B)

Our external blanks are manufactured using a lightweight solid laminated timber core and faced with a thick paint grade exterior guality plywood which is ideal for paint finishing. FD30 fire rated and lipped on all four edges, (except for size 2440 x 1220mm & 2135 x 915mm) these doors can be considerably reduced in height and width. Apertures can be cut providing the aperture size, glass and bead density are in conjunction with the manufacturer's fire certification (please check the certificate for limitations) making these doors the ideal cheap fix for your basic exterior requirements.

- · Lightweight solid laminated timber core
- Thick exterior paint grade guality plywood faces
- Un-finished for prompt on-site painting
- Can be cut to any size (lipped doors will require re-lipping)



FD30 44mm 1981 x 686mm 1981 x 762mm 1981 x 838mm 2032 x 813mm 2135 x 915mm 2440 x 1220mm



**DOOR BLANKS** 




Mendes are one of the Uk's leading distributors of Premdor products and are therefore able to offer the complete range of doors listed in the Premdor catalogue. Please contact our sales team even if the Premdor product you require is not shown on the following pages.

Premdor Portfolio range incorporates cutting edge Veneer Match technology which creates engineered real veneers with consistent grain and colour, offering a unique and stunning finish for a multitude of environments. Supplied with PEFC chain of custody as standard and offering a Solid core, 30 & 60 minute fire option. Glazed options are also available on request; please call our sales team for more info on 01225 811411



GHT GREY VERTICAL 4 LINE

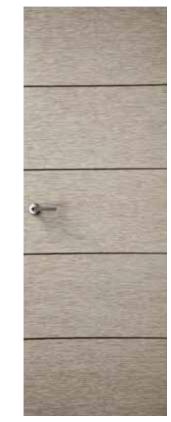

LIGHT GREY HORIZONTAL 4 LINE



BLACK & LIGHT GREY 2 STILE



SCANDINAVIAN HORIZONTAL

**SCANDINAVIAN 2 STILE** 

- Veneer Match technology creates engineered real veneers with consistent colour and grain
- Supplied PEFC chain of custody as standard
- Solid core, 30 & 60 minute fire door options available
- Glazed fire door options available



## **PREMDOR** Portfolio Range Continued...

The Premdor Portfolio range offers an unrivalled collection of stylish finishes which are created by engineering real veneers into a consistent colour and grain that still allows for natural variation within the doors. Each door has its own individual personality ensuring that they are never identical.



- Veneer Match technology creates engineered real veneers with consistent colour and grain
- Supplied PEFC chain of custody as standard
- Solid core, 30 & 60 minute fire door options available
- Glazed fire door options available



# **PREMDOR** Portfolio Range Continued...

Although traditional in its inspiration, this beautifully crafted range is the ideal choice for modern, fresh interiors. They add a touch of elegant heritage to a beautiful home or busy, creative work environment.



- Veneer Match technology creates engineered real veneers with consistent colour and grain
- Supplied PEFC chain of custody as standard
- Solid core, 30 & 60 minute fire door options available
- Glazed fire door options available



# **PREMDOR** Interior Innova<sup>M</sup>/ Interior Flush Veneer

Veneered Flush doors have high quality natural timber veneers, laid over and concealing the timber edge lippings. The factory lacquer gives a superior finish. As with all natural veneered products, some variation in colour and grain should be expected. The Innova Ash doors are inlaid with American walnut and the Oak with Bubinga.





INNOVA WHITE OAK VENEER

INNOVA ASH VENEER


- Factory lacquered faces
- PEFC chain of custody as standard
- 44mm FD30 fire door and glazed options available
- Premdor 'Option Plus' available on most designs



www.pation

## **PREMDOR** Traditional Internal Moulded Panelled & glazed Doors


Premdor Moulded Panel doors incorporate quality FSC accredited one piece facings, offering excellent appearance and performance. They are available in a wide choice of designs, sizes and core constructions, making them a versatile door choice. The range has third part environmental accreditation supplied with chain of custody.

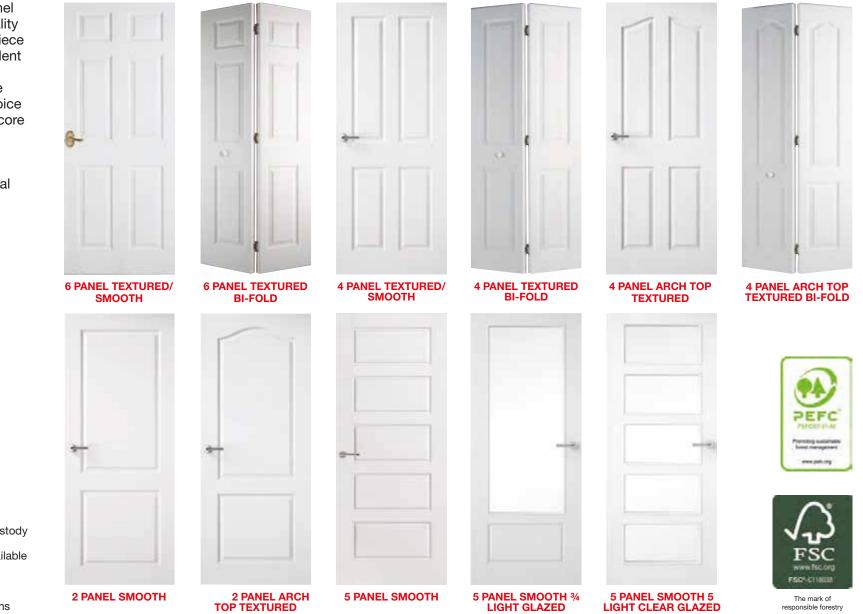

- FSC & PEFC chain of custody
- Various core options available including FD30 & FD60
- Premdor 'Option Plus' available on some designs

# **PREMDOR** Premium Internal Moulded Panelled & glazed Doors

The modern door designs on this page are perfect for today's minimalist interiors. All doors are factory primed so no need for further preparation prior to decoration. Premdors 'Option Plus' is available for most door designs and includes additional servicing such as machining for hinges/locks, machining for fire seals to FD30 doors and factory white paint finishing. For more information please contact our sales office on 01225 811411.

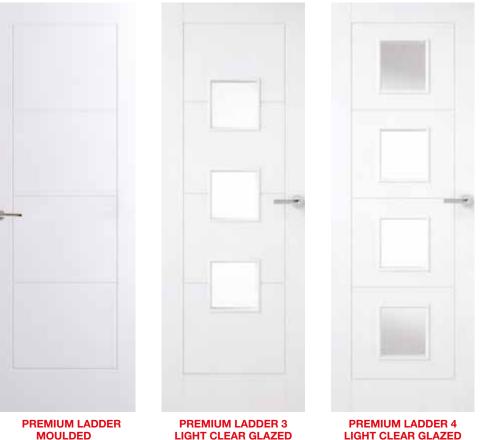





PREMIUM VERTICAL 5 PANEL MOULDED GLAZED

- White base coat faces
- FSC & PEFC chain of custody
- Various core options available including FD30 & FD60
- Premdor 'Option Plus' available on some designs






The mark of responsible forestry

## **PREMDOR** Premium Internal Moulded Panelled & glazed Doors Continued...

The modern door designs on this page perfectly compliment on-trend minimalistic interiors and modern homes. All doors are factory primed so no need for further preparation prior to decoration.

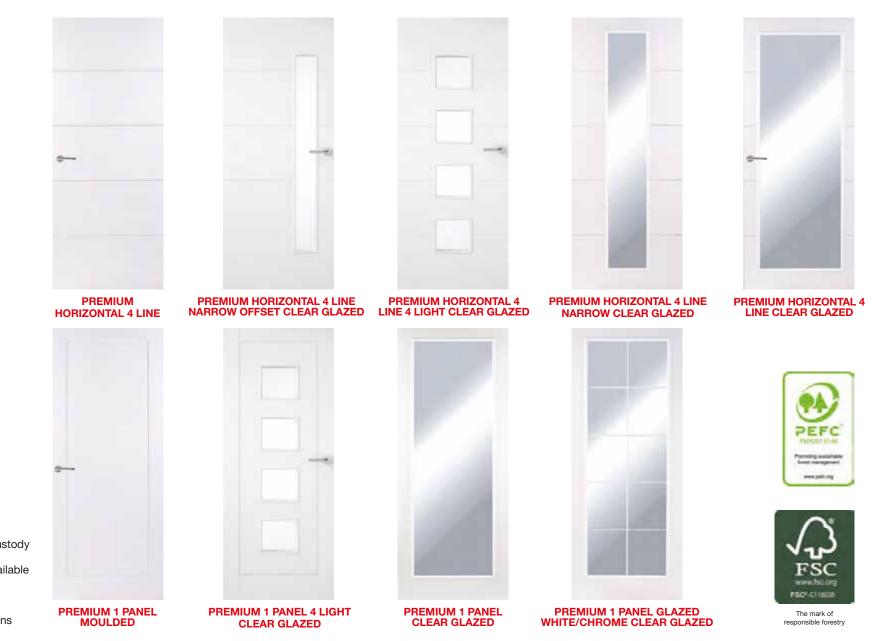

- FSC & PEFC chain of custody
- Various core options available including FD30 & FD60

• Premdor 'Option Plus' available on some designs

55

## **PREMDOR** Manhattan Glazed Door Range

Bold and impressive, the Manhattan door will add style to any home. The fresh and bright design of doors in the Manhattan range brings light and style. The clean and simple line designs give a modern finish to this cost effective professionally glazed door. Chrome and white effect leading available on all square top patterns and the arch top patterns are only available in white.



- White base coat faces
- Single pane glazing with paper wrapped MDF or timber glazing cassette (at our option)
- Textured or Smooth moulded panel facings
- Premdor 'Option Plus' available on some designs
- Clear toughened glass
- Wide range of sizes available



Premdor's flush foil doors offer a guaranteed consistent colour and look which is ideal for when an unvarying finish is essential. Offering clean lines and a modern wood grain appearance, flush foil doors are a good cost effective choice. Door faces are fully finished, durable and easy to clean and with FD30 fire rated and glazed options to match, these doors have become popular for those requiring consistency. Chrome glazing bars create the full light design which is glazed with clear toughened glass. The doors in this range are supplied with PEFC chain of custody as standard.

- Foil doors offer clean lines and a modern wood grain appearance
- Chrome glazing bars
   creates full light designs
- Supplied with PEFC chain of custody as standard
- Premdor's 'Option Plus' and factory servicing is available



### Interior Flush Paint Grade Plus & Popular

Where a simple or minimalistic door appearance is required or necessary, a trouble free paint grade flush product remains the popular choice. Door faces are factory primed (except popular which is supplied un-finished) to reduce decoration time and site cost. On Lipped Paint Grade Plus the lippings are un-primed and require preparation and finishing on-site.





- Primed faces (Paint Grade Plus only)
- PEFC Chain of Custody as standard
- 44mm FD30 fire door option available
- Glazed aperture options available
- Wide range of sizes available
- Premdor 'Option Plus' available on most designs





## **PREMDOR** Interior Flush Veneer

These images show the aperture options available on nearly all flush style doors throughout our brochure. Glass can either be clear fire rated or clear wired fire rated with non-fire rated options also available. Design codes 16G, 18G, 19G, 20G, 21G, 25G & 29G all comply with the Building Regulation Part M Mobility.



• Glass can be either fire rated clear or wired

## **PREMDOR** Interior High Pressure Laminate (HPL)

Premdor's full high pressure laminate door range combines superior durability and strength with excellent impact and scratch resistance – perfect for busy environments, such as hotels, communal areas and offices. Manufactured on a made to order basis with a solid core as standard, doors are available as singles or pairs, with or without apertures. Framed 30 or 60 minute fire doors are also available. The images below are examples of some of the designs and colours available.



- Excellent impact & Scratch resistance
- Superior durability & Strength
- Easy for maintaining
- Functional and hygienic in everyday use

Available in 80 standard colours with additional options available on request.



## **PREMDOR** Exterior Composite Doors

Premdor's new selection of easy clean, pre-hung composite doorsets are manufactured by Door-Stop International using Glass Reinforced Plastic (GRP) skins, all doorsets provide life-long performance. With thermally-enhanced obscure Stippolyte glazing, which can be fully reglazed due to a patented removable cassette, each set is Part L compliant and exceeds the current requirements for energy efficiency. Part M requirements are also met with the inclusion of a 15mm wheelchair-friendly threshold. Please call our sales team on 01225 811411 for more details.

These images are examples of some of the designs and colours available. Please note that inside door face is always supplied in white.



4 PANEL 2 LIGHT BLACK/WHITE



6 PANEL 2 LIGHT BLACK/WHITE



CONTEMPORARY 4 LIGHT GREY/WHITE



COTTAGE 1 LIGHT BLACK/WHITE

- Available in Black, White or Grey (Grey is on available on the Contemporary 4 Light)
- Inside door faces always supplied in white
- Secured by Design approved
- Thermal Glass
- Includes hardware (ask for details)

## **PREMDOR** Exterior Softwood Panel

For a cost effective replacement or refurbishment door, Premdor exterior panel doors are available in a number of traditional designs. Readily available, softwood panel doors help retain the traditional features of your property during refurbishment. The doors on this page are supplied unfinished and unglazed for on-site decorating and glazing of your choice. It is advised that this range is used for refurbishment and replacement projects only and not on new builds.



KXT SOFTWOOD





SC SOFTWOOD









22 SOFTWOOD PAIR



10 SOFTWOOD

- Supplied un-glazed with glazing bead supplied as standard
- Selected softwood material with engineered components
- Un-finished for on-site paint or stain finishing
- External softwood frames to suit
- Dowel and glued construction

61

**20 SOFTWOOD PAIR** 

2XG SOFTWOOD



### Performance Timber Windows & Doors

Whether you are upgrading your original frames or restoring your home to its former glory, Mendes supply timber casement windows, sash windows and doors which will add value to your home. Combining British design with the World's leading window technologies, the result is a range of engineered timber products packed with innovation but entirely traditional in appearance.

We pride ourselves on our commitment to providing high quality products that not only look great but are engineered to provide a long life of problem free use. Mendes product quality is endorsed with robust guarantees that are second to none in the joinery industry.


High quality paint coatings, energy efficient glazing systems and anti-warp, anti-twist timber sections are just some of the features that are 'designed in' as standard throughout the range. Security comes as standard too. All glass is fitted from room side to prohibit would be intruders from gaining entry by removing the panes, whilst high security locking systems secure all opening windows and doors for complete peace of mind.

Sustainability is at the heart of Mendes' ethos. Only Timber sourced from FSC certified forests in northern Europe is used in the manufacture of these products. Our supplier is also the first timber window manufacturer in the UK to achieve a British Fenestration Ratings Council (BFRC) energy rated window back in 2005.

Fungal & Insect	Sealed Unit	Hardware
30 YEARS	10 YEARS	10 YEARS
GUARANTEE	GUARANTEE	GUARANTEE
Workmanship	Paint	Stain
10 YEARS	8 YEARS	5 YEARS
GUARANTEE	GUARANTEE	GUARANTEE

Internal Bead for added security

> Factory - applied micro-porous coatings provide maximum protection

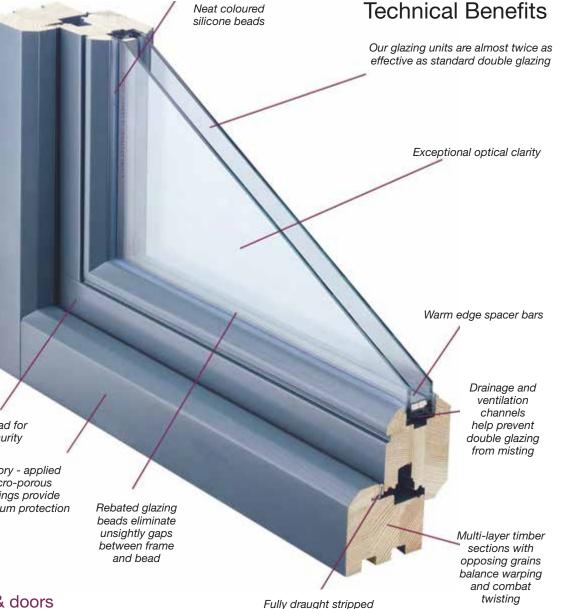

Hassle-free supply of made-to-measure timber windows & doors



Performance Timber Windows & Doors Continued...

### Stormproof Windows

Stormproof windows feature draught stripped, rebated sashes which provide robust protection against the elements. The design, mirroring that adopted by aluminium and PVCu casements, lends itself perfectly to modern style buildings and new builds. Our Stormproof range shares the same technological platform as our Flush Casement with highly efficient double glazing units and advanced draught sealing combining to provide exceptional levels of insulation. Security is provided by means of robust multi-point locking mechanisms and, crucially, internal beading. A wide range of styles and sizes are available which may be tailored to suit your project's requirements and specifications. With over two hundred colours to choose from and the ability to specify different shades internally and externally our range allows you to precisely determine the look you want for your home.

### Sash Windows

Our modern sash windows faithfully emulate the lines of originals commonly found in Georgian and Victorian homes, but bring 21st century standards and warmth, weathering and performance. We also offer a modern alternative spring system which is uniquely concealed. Careful attention to draught stripping eliminates rattles and draughts, whilst energy efficient glazing maximises solar gain and locks in heat. Sashes may be hung on traditional weights and sash cords or alternatively on neatly concealed springs. A unique easy clean system is available as an option on our traditional sash boxes, which allows the bottom sash to be tilted into the room for maintenance. Our system allows great dimensional flexibility allowing you to tailor your sash windows to the precise requirements of your project. Slim glazing bars in a wide variety of configurations may be added as required.







#### Hassle-free supply of made-to-measure timber windows & doors

For more information on Performance Timber Windows & Doors contact our sales office on 01225 811411 to request a separate, more detailed brochure.





Mendes

**Quality Door Distribution** 

The traditional proportions of sash and frame make this product a favoured choice for sensitive developments and conservation areas. Modern performance expectations are met too with highly efficient double glazing units and advanced draught sealing combining to provide exceptional levels of insulation. Security is provided by means of robust multi-point locking mechanisms and, crucially, internal beading.

Flush casements which suit our entrance and French doors, giving your project total design flexibility. A wide range of styles and sizes are available which may be tailored to suit your project's requirements and specifications. With over two hundred colours to choose from and the ability to specify different shades internally and externally our range allows you to precisely determine the look you want for your home.

### Tilt/Turn Windows

Continental style Tilt/Turn windows are fitted with hinges that allow the sash to turn into the room from the side for ease of cleaning or tilt in from the top for controlled ventilation.

Made-to-measure Tilt/Turns are fitted with high security multi-point perimeter locking with cams and bolts to guard against jemmy attack.

The windows arrive fully factory finished in a choice of micro-porous paint or stains and are factory glazed with argon gas filled units comprising soft coat energy saving glass to give 1.1W/m2K U-value.

Externally a colour matched drip bar conceals an in-built drainage system which discharges water efficiently and guards against leaks.







Hassle-free supply of made-to-measure timber windows & doors

For more information on Performance Timber Windows & Doors contact our sales office on 01225 811411 to request a separate more detailed brochure.



### Performance Timber Windows & Doors Continued...

### **Bi-Fold & Patio Doors**

Our bi-fold doors provide a highly versatile solution to open up space between house and garden. Doors stack neatly to the inside or outside in a wide range of configurations and can span an aperture of up to nine metres in width. Depending on-site conditions, a flush track may be added to form an unobstructed walkway. Importantly, each door leaf is supported at both the top and the bottom of the sash providing stability in use and longevity of performance. Horizontal sliding patio doors can be manufactured with two, three, four or six sliding panels in a variety of configurations and in a width of up to three metres per panel. High security multi-point locking mechanisms, security glazing and anti-lift out devices make them a robust barrier against forced entry. High performance paint coatings which provide maximum protection for minimal maintenance are common to the range. Bi-folds and Patios are made to measure and factory painted in a wide choice of colours to perfectly compliment your interior and exterior design.



#### Hassle-free supply of made-to-measure timber windows & doors

For more information on Performance Timber Windows & Doors contact our sales office on 01225 811411 to request a separate, more detailed brochure.

### Entrance Doors

Entrance doors are available, made-to-measure, in twelve different styles and may be enhanced with a range of feature glasses modelled on authentic Victorian glazing motifs. A wide range of traditional shades or rich bold colours such as moss green, steel blue and ruby red is available. Multiple colours can be combined on the same door, enabling the inside face to be suited to your internal décor. Ironmongery can be added as required including spy holes, letter-plates, knockers and security chains. Double opening, French doors can be made to open in or out as best suits your room layout and will suit both traditional and contemporary schemes.

All doors are hung on robust hinges and are fitted with modern, high security multi-point locking mechanisms, we are able to provide door sets that comply with Document M Mobility Access regulations.







### Designer & Traditional Ironmongery - Mendes Handle Packs

### Everything you need for a door in one pack

New for 2014, is our range of internal & external Ironmongery. Some of the more popular items are displayed on the following pages, but if you require something not shown, please contact the sales team who will assist in helping you find what you are looking for.

#### STANDARD LATCH PACK CONTENTS

- 1 pair of handles/levers (choice of nine different styles)
- 3no 75mm (3") satin stainless steel ball bearing butt hinges with screws (non FD30 only)
- 75mm standard tubular latch

#### **BATHROOM PACK CONTENTS**

- 1 pair of handles/levers (choice of nine different styles)
- 3no 75mm (3") satin stainless steel ball bearing butt hinges with screws (non FD30 only
- 75mm mortice bathlock
- Bath turn & release

#### LOCK PACK CONTENTS

- 1 pair of handles/levers (choice of nine different styles)
- 3no 75mm (3") satin stainless steel ball bearing butt hinges with screws (non FD30 only
- 75mm 3 lever mortice sashlock
- Standard key escutcheon

#### FD30 Fire door upgrade

Where FD30 doors are required, the hinges in any of the pack options above can be upgraded to 4" firedoor hinges.

Please specify when ordering or enquiring



- **Step 1** Decide the thickness of the door which requires ironmongery.
- Step 2 Choose one of the 9 different styles of levers displayed on page 63.
- Step 3 Decide which type of locks or latches the door requires e.g. Standard Latch, Bath Lock or Sash Lock, images of the available options on page 64.
- Step 4 Call the sales team on 01225 811411 with your selection for price and availability.



Designer & Traditional Ironmongery

Mendes handle pack - dual finish handle / lever options



Itonmongery



**Designer & Traditional Ironmongery** 

Mendes handle pack - hinges, locks, latches, bath turn & escutcheon



75MM STAINLESS STEEL BALL BEARING BUTT HINGES



100MM STAINLESS STEEL BALL BEARING BUTT HINGES FOR THE FD30 UPGRADE



**TUBULAR MORTICE LATCH** 



**3 LEVER MORTICE SASHLOCK** 



STANDARD KEY ESCUTCHEON



**BATHROOM THUMBTURN & RELEASE** 



MORTICE BATHROOM LOCK



### Designer & Traditional Ironmongery

### Other ironmongery handle options include



ennongen

Please call our sales team on 01225 811411 for price and availability.



### Pocket Systems & Sliding Door Gear

### Pocket Door System

The Pocket Door System is a simple way to increase available space in many domestic applications, particularly dining rooms, en-suite bathrooms, cloakrooms and doors into kitchens.

The Pocket Door System is suitable for doors with a thickness of up to 44mm. For doors of 35mm to 44mm thick the frame adapter kit supplied should be used.

Where 2 converging doors are to be fitted, a Jointing Kit (61600) should be used with 2 Pocket Door Systems.

### Pocket Door System components

The Pocket Door Systems are supplied in kit form with all of the components listed below:

- 4 x steel wrapped studs
- 2 x stud foot brackets
- 2 x 3-wheel hangers
- 2 x hanger mounting plates
- 1 x rubber door stop
- 2 x nylon door guides
- 1 x adaptor Kit
- 1 x fixing kit

Fire rated pocket door systems available – Price on application.

### Pocket Door System range

Model H30 H36 H42

762mm 915mm 1067mm

Max. door width Max. door height 2032mm 2032mm 2032mm

Max. door thickness	Max. door weight	Code
35mm - 44mm	56kg	61730
35mm - 44mm	56kg	61736
35mm - 44mm	56kg	61742











### Straightway 50 (straightway sliding—top hung)

This sliding door gear is designed to support timber doors with a maximum weight of 50kg per door. This system is the most effective sliding door system we offer and the most straight forward. Each single length of aluminium track (2.5m) requires a blister pack\* which contains all other parts needed.

Straightway 50 2.4 Meter Track - Code 11824 Straightway 50 Blister Pack - Code 01050

 $^*$  The blister pack that is supplied with this system contains: 2 x hangers with nylon wheels and integral ball bearings, 1 x pair of track end pieces, 1 x floor mounting guide, 1 x spanner and 1 x fitting guide.



For full kit contents or further information, please contact the sales team on 01225 811411.

### Foldaside Sliding Door Gear

Many different configurations available – please contact our sales team on **01225 811411** for a detailed quotation on you exact requirements.





### Care & Installation Guide

TIMBER IS A NATURAL MATERIAL AND SOME VARIATION IN THE COLOUR, GRAIN AND TEXTURE CAN OCCUR. IT IS THEREFORE OF UTMOST IMPORTANCE THAT QUESTIONS ARE RAISED PRIOR TO COMMENCEMENT OF ANY WORK OR MODIFICATIONS TO THE DOOR - NOT AFTER THE DOOR HAS BEEN HUNG. REMEMBER, ANY WORK CARRIED OUT ON YOUR DOOR CONSTITUTES ACCEPTANCE AND RETURNS WILL NOT BE ACCEPTED.

#### Preparing your door for Installation

Uneven expansion or contraction of component parts within a door is the most common reason for the product to 'fail' or not perform satisfactorily. These movements are caused by a change in moisture level within the product and to protect against this, the door must be fully sealed before installation as detailed in the finishing sections below. In addition please be aware of the following:

- If a door needs to be trimmed it must be reduced equally from both sides. Each side of a door may be trimmed up to a maximum of 6mm for doors with a lipping 10mm or more, and 3mm for doors with a 6mm lipping. Further reductions may be possible on non fire-rated doors but please remember that this may result in exposing the engineered core which will then need to be sealed or re-lipped.
- 2. Avoid cutting / fitting locks or latches at a rail or glazing bar joint as this will cause weakening of the door.
- 3. We recommend the use of 3 hinges to offer more rigidity and strength.
- 4. FD30 fire rated doors must be installed in accordance with the relevant fire certificate it is the responsibility of the person fitting the door to ensure that the intumescent strips or seals are fitted in door, frame or lining as stipulated.

#### **Finishing & Sealing**

- Untreated products must be fully sealed prior to hanging this applies to all surfaces including tops, bottoms and all recesses cut for hinges, locks, handles and letter plates etc. Waxes and oils are not considered suitable for sealing a door and if used will invalidate any guarantee should the door subsequently fail.
- 2. Please take care if obliged to use a water based sealant as if applied too liberally it will penetrate the veneer and may cause bubbling to occur.
- 3. Pre finished products must be re-sealed as above in areas where timber has been exposed during alterations. White primed products should be sealed with a final top coat with particular attention paid to any areas where the priming has been removed.
- 4. To obtain the best finish lightly sand, de-nib and wipe clean all surfaces before initial sealing and before final coat is applied.

#### **External Products - Additional Information**

Our engineered external doors must be protected from direct sun and rain. This is achieved by a porch, canopy or recess of ideally 1.5 metres. If this precaution is not observed the performance of the door will not be satisfactory and any guarantee will be surrendered. In addition to finishing and sealing as above please be aware of the following.

- 1. We recommend a minimum of 3 coats of a suitable finishing product be applied to fully seal a door or frame.
- 2. We recommend the fitting (externally) of a weather bar at the bottom of the door.
- 3. Try to avoid painting a door black (or very dark) as dark colours absorb heat making the product very hot which can lead to cracking or excessive shrinkage.
- With external oak doors please ensure that the sealant contains a UV protection element. WARNING - If what you are applying is clear it will probably not contain UV protection. Check with your finishing supplier before purchasing.

#### **Future Maintenance**

With an external door it is impossible to advise how long the applied finish will offer protection. Much depends on the finishing product used, the facing of the door (N, S, E or W), and how forcefully the door is opened and closed. The general rule is to ensure the product remains sealed, preventing moisture movement. If lacquer becomes cracked, scuffed or scratched, re-seal the offending part of the door immediately. If shrinkage lines appear around panels re-seal exposed timber immediately.

Sealant around external glazing apertures can become brittle and crack if subjected to periods of high temperature; if this becomes evident re-seal with suitable clear waterproof mastic for external use.

Finally, we recommend that you wash the door with warm water and detergent at minimum every two years, and apply a further coat of finish.



### Treatment of Doors

- 1. The door must be kept and stored dry and flat.
- 2. The door must be correctly treated without delay and prior to hanging. It is most important that the top and bottom edges are completely and fully treated before the door is hung. Both faces and all four edges and any 'cut outs' such as letter boxes, locks etc. require full treatment. It is vital that the 'end' grain is completely protected as this is where moisture can most easily penetrate causing swelling, splitting and warping.
- 3. The door should be reduced in size equally from both sides when fitting. Mortice locks fitted at rail joints can result in removal of one or more dowels or cause serious damage to a mortice, so weakening the joint. Mortice lock cavity should be kept to a minimum size and not fitted at a rail joint.
- 4. Usually 3 coats of a proprietary branded finish should be satisfactory but you should treat the door in accordance with instruction of the manufacturer of your chosen finish. Please note that waxing and/or oiling do not properly seal a door and are not recommended. It is also not recommended to use a water-based system on our doors.
- 5. As timber is a naturally grown product subject to change due to variations of humidity and temperature, we try to ensure that the timber has been prepared to make it suitable. It is obvious that we cannot know all the circumstances surrounding every situation in which our products are stored and installed, and we therefore cannot give any guarantee against shrinkage, warping or splitting.
- 6. Any External door but particularly oak, must be protected from exposure to direct sun and rain. This is usually achieved by a porch, recess or overhang of a minimum of 1.5 metres. If this precaution is not observed, the performance and appearance of the door will not be satisfactory.
- 7. Regular maintenance of doors should be observed to prevent breakdown of paint film and to protect the fibre from deterioration. Please remember—the 'finishing' seals the door and prevents moisture movement, the main cause of swelling and shrinkage resulting in splitting and bowing. If the 'finish' is not complete, or breaks down due to poor maintenance, the door's performance will deteriorate.

### Terms & conditions of sale

#### GENERAL

All orders must be confirmed in writing by the customer either by fax, post or email. Our sales contract is between the persons or customer detailed on the sales order acknowledgement and not with third party persons or customers. We shall not be held responsible for any incidental work or expenses arising out of or because of any defect in our products, or for bad workmanship. In the event of goods proving defective (manufacture defect) which need replacement, our liability shall not exceed the price paid for the defective piece(s).

#### PRICING

Prices quoted in our pricelist, or any other literature issued by us, are subject to alteration without notice. Unless otherwise agreed in a letter, email or facsimile by us, goods will be invoiced at prices applicable at the date of despatch. All prices are subject to VAT and this will be charged at the standard rate applying at date of despatch.

#### LEAD-TIME

Delivery lead-times quoted or advised are an estimate and should only be used as a guide. Carpenters or fitters should not be booked until the products have arrived on-site or to the intended delivery address. We shall not be held responsible for any expenses arising due to failed deliveries within the estimated time frame. Items not normally stocked by us will be regarded as 'specials' or 'to order', which are not returnable and non-refundable. We will use our best endeavours to affect any alterations required subsequent to placing of order, but reserve the right to invoice for full payment of the original specification. Any deposit paid with order is only refundable at our discretion.

#### CANCELLATIONS

Any products that have been manufactured or non stock items which have arrived at the time of cancellation will be charged at the full quoted price at our discretion. Where the Company accepts orders for 'special' or 'to order' products the Company will endeavour to fulfil your requirements, but if it proves uneconomical or impractical to supply your complete order, the Company reserves the right to cancel the Contract or the remaining products outstanding. The Customer is therefore only liable to pay for the delivered products.

#### DELIVERY

All goods shall be unloaded promptly at the delivery point. Any costs arising as a result of delay to transport or for goods damaged whilst unloading will be for the account of the Purchaser. No claims for damaged or defective goods will be met unless reported at least provisionally within three working days from the date of receipt, and reported in detail within seven working days. Edge or corner damage and shortages should be noted on the Despatch Note at time of receipt. Pallets and packaging are used to protect your order from damage. This packaging forms part of your order and is not to be returned on the delivery vehicle unless prior agreement has been arranged. Returning of empty pallets or packaging on the delivering vehicle may result in charges made to the original purchaser.

#### RETURNS

Returns and refunds may be accepted at the discretion of the company. Returns due to a customer order error or cancellation will be subject to our standard restocking/handling charge of 30% of the purchase price, and products must be returned in a perfect resaleable condition. If customers are unable to arrange the return of unwanted products, a collection charge will be applicable. 'Specials' and standard non stocked items will not be accepted for return. Credits will be issued after a full inspection has been carried out on the return of the product. Any returned products which are not in the original packaging and in a perfect resaleable condition will not be credited or returned to the customer.

#### PAYMENTS

Payment is required in full in accordance with the terms agreed at the time of opening a credit account, or with the terms stated on our Order Acknowledgement. No variation to these terms will be permitted unless specifically acknowledged in writing by us. We reserve the right to charge interest on any overdue invoices. Interest will be charged at the rate of 8% per annum over the prevailing Base Rate of HSBC Bank plc. Title of goods under these Terms & Conditions will not pass to the Purchaser until all outstanding amounts have been settled and payment has been received in full by us or by such persons as may be designated by us at the time of invoicing. Should the Purchaser sell the goods in such a way as to pass valid title to a third party, the Purchaser shall hold the proceeds of such a sale in trust for us. Notwithstanding that title to the goods shall not pass except as provided above, the goods shall be at risk of the Purchaser from the time of their collection or on delivery to an agreed destination.

#### DISCLAIMER

Whilst every effort has been made to replicate the colour of our products in this catalogue, due to printing processes, product colour cannot be matched 100%.



# **Mendes** Quality Door Distribution

#### **PM-Mendes (International) Limited**

Head Office 30 Leafield Way Leafield Industrial Estate Corsham, Wiltshire, SN13 9SW Telephone: 01225 811411 Fax: 01225 812112 Email: doorsales@pm-mendes.co.uk www.pm-mendes.co.uk

#### Northern Office

Maghull Business Centre 1 Liverpool Road North Maghull, L31 2HB Telephone: 0151 5311052 Fax: 0151 5200867 Email: northern@pm-mendes.co.uk

